

GRAINMASTER® SILOS

1800 Series Silos

	MODEL	CAPACITY (m3)	TONNES *	DIAM (m)	OVERALL HEIGHT (m)	AUGER LGTH (ft) **
30° CONE BASE SILO	1801	51.9	43.23	5.5	4.79	28
	1801.5	65.4	54.48	5.5	5.36	31
	1802	78.9	65.72	5.5	5.93	34
	1802.5	92.5	77.05	5.5	6.5	38
	1803	106	88.30	5.5	7.07	41
	1803.5	119.5	99.54	5.5	7.64	44
	1804	133	110.79	5.5	8.21	47
	1804.5	146.5	122.03	5.5	8.78	51
	1805	160.1	133.36	5.5	9.35	54
	1805.5	173.5	144.53	5.5	9.92	57
	1806	186.2	155.10	5.5	10.49	61
35° CONE BASE SILO	1801	54.4	45.32	5.5	5.1	30
	1801.5	67.9	56.56	5.5	5.67	33
	1802	81.4	67.81	5.5	6.24	36
	1802.5	94.9	79.05	5.5	6.32	37
	1803	108.4	90.30	5.5	7.38	43
	1803.5	122	101.63	5.5	7.95	46
	1804	135.5	112.87	5.5	8.52	49
	1804.5	149	124.12	5.5	9.09	52
	1805	162.5	135.36	5.5	9.66	56
	1805.5	175.9	146.61	5.5	10.22	59
	1806	188.6	157.85	5.5	10.79	62

* Tonnes based on wheat density of 833kg/m³


** Length of auger based on a lift angle of 35 degrees

Grainmaster Silos has been manufacturing a variety of different storage solutions, servicing a number of industries worldwide, collectively for over 125 years.

Grainmaster Silos incorporate a large range of conical-based silos in capacities from 5 tonnes through to 300 tonnes for both on-farm and commercial applications.

There are also flat-bottom silos available with capacities up to 6000 tonnes.

The complete Grainmaster product range can be manufactured from mild steel, galvanized sheet and coil, stainless steel, aluminium or colorbond, to ensure the best results for the product being stored.

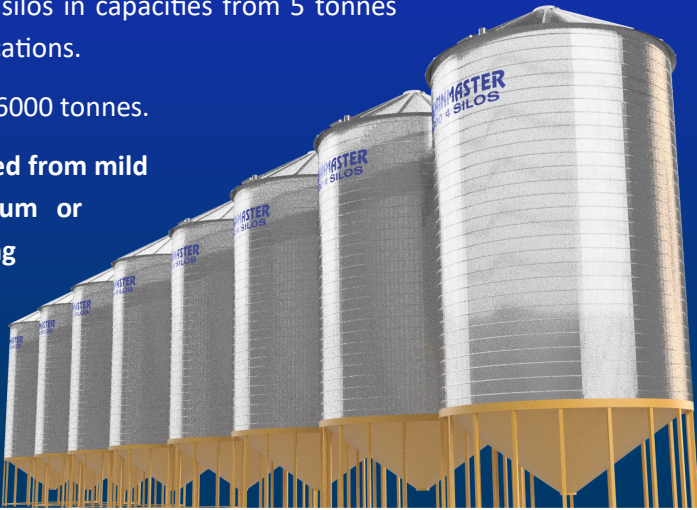

CONTACT US AT

57-75 Industrial Avenue, Toowoomba, QLD 4350 EMAIL: Steveb@thedaveygroup.com.au PHONE: (07) 46347767